



Quanzhou Smarts Electronic & Technology Co.,Ltd
 No.6 Building Fulong Park Fuqiao Lichen,Quanzhou,Fujian,China
 Tel.:+86 (595) 2725 6889 / Fax:+86 (595) 2246 5526 / phone:(+86) 1348 9577 737
 E-mail: steven@smartselectronic.com.cn / sales1@smarts-electronics.com
 Skype: steven821228

Slim shape 30W , 100-277VAC constant voltage LED driver

Features:

- Output constant voltage type
- Input voltage range 100-277VAC
- UL/cUL listed, Class 2, Class P approval
- Built-in PFC function / Efficiency > 84% / PF> 0.95
- Protections:short circuit/over voltage/over heat
- IP20 design for indoor dry environment installations
- Cooling by free air convection
- PWM output, does not change the color index
- Full protection aluminum housing, for dry, damp, wet location
- Suitable for LED lighting and moving sign applications
- Compliance to worldwide safety regulations for lighting
- 7 years warranty



Specification




model		SMT-012-030VWSP	SMT-024-030VWSP
Output	DC Voltage	12VDC	24VDC
	Voltage Accuracy	±5%	±5%
	Rated current	2.5Amp	1.25Amp
	Rated power	30W	30W
	Voltage Regulation	±0.5%	
	Load Regulation	±1%	
Input	Voltage Range	100-277 VAC	
	Frequency Range	47~63HZ	
	Power Factor (Typ.)	0.99@120VAC 0.98@230VAC 0.95@277VAC	
	THD(Typ.)@ full load	<15%@120VAC <20%@230VAC <20%@277VAC	
	Full Load Efficiency	82%@120VAC ; 83%@230VAC; 84%@ 277VAC	
	AC Current (Typ.)	7A, 50%, 420us @120VAC ; 30A,50% 90us@230VAC; 12A,50%480us@277VAC	
	Leakage current	<0.50mA	
Protection	Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.	
	Over Loading	≤120% shut down o/p voltage, re-power on to recover	
	Over temperature	100°C±10°C shut down o/p voltage, automatically recover after cooling.	
Environment	Working TEMP.	-40~+60°C	
	Working Humidity	20~90%RH,non-condensing	
	Storage TEM.,Humidity	-40~+80°C, 10~95%RH	
	TEMP.coefficient	±0.03%/°C (0~50°C)	
	Vibration	10~500Hz, 2G 10min./1 cycle, period for 60min. each along X,Y,Z axes	



Quanzhou Smarts Electronic & Technology Co.,Ltd
 No.6 Building Fulong Park Fuqiao Lichen,Quanzhou,Fujian,China
 Tel.:+86 (595) 2725 6889 / Fax:+86 (595) 2246 5526 / phone:(+86) 1348 9577 737
 E-mail: steven@smartselectronic.com.cn / sales1@smarts-electronics.com
 Skype: steven821228


Safety&EMC	Safety standards	EN61347-1 EN61347-2-13
	Withstand voltage	I/P-O/P:3.75KVAC
	Isolation resistance	I/P-O/P: 100MΩ/500VDC/25°C/70%RH
	EMC EMISSION	Compliance to EN55015,EN61000-3-2 (≥60%load)
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,11, EN61547, light industry
Others	Weight	0.20Kg
	Size	260*32*18mm (L*W*H)
	packing	50PCS/CTN
Notes	1. All parameters NOT specially mentioned are measured at 110VAC, 277VAC input , Rated load and 25°C of ambient temperature. 2. Tolerance:includes set us tolerance,line regulation and load regulation . 3. The power supply is considered as a component that will be operated in combination with final Equipment. Since EMC performance will be affected by the complete installation,the final equipment manufactures must be-qualify EMC Directive on the complete installation again.	

■ Mechanical Specification

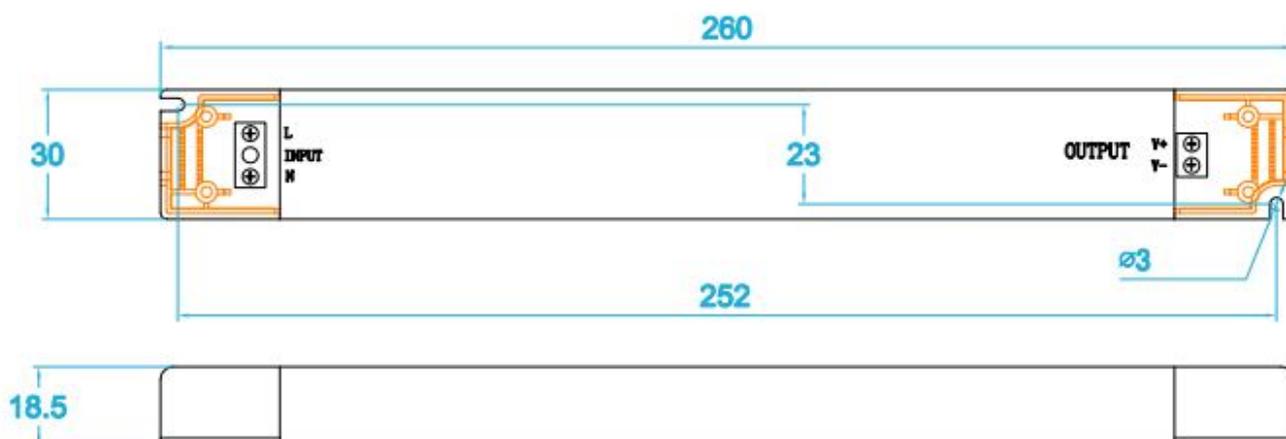

- Input with Live Wire(L) Neutral Wire (N)
- Output terminals "Red" to LED Positive side (+) and "Black" to LED Negative side (-).


■ Derating Curve

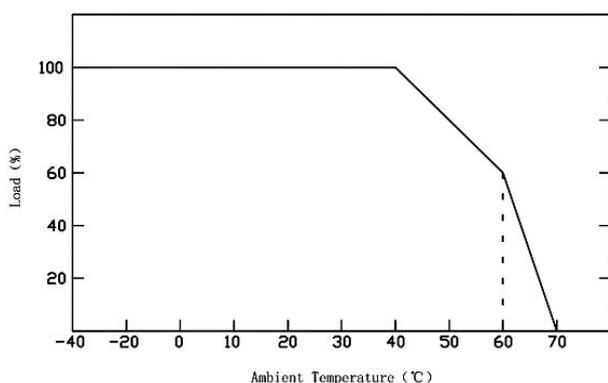



- Load carried in accordance with the load derating curve, according to the ambient temperature derating, in order to extend the working life

■ Connecting Diagram

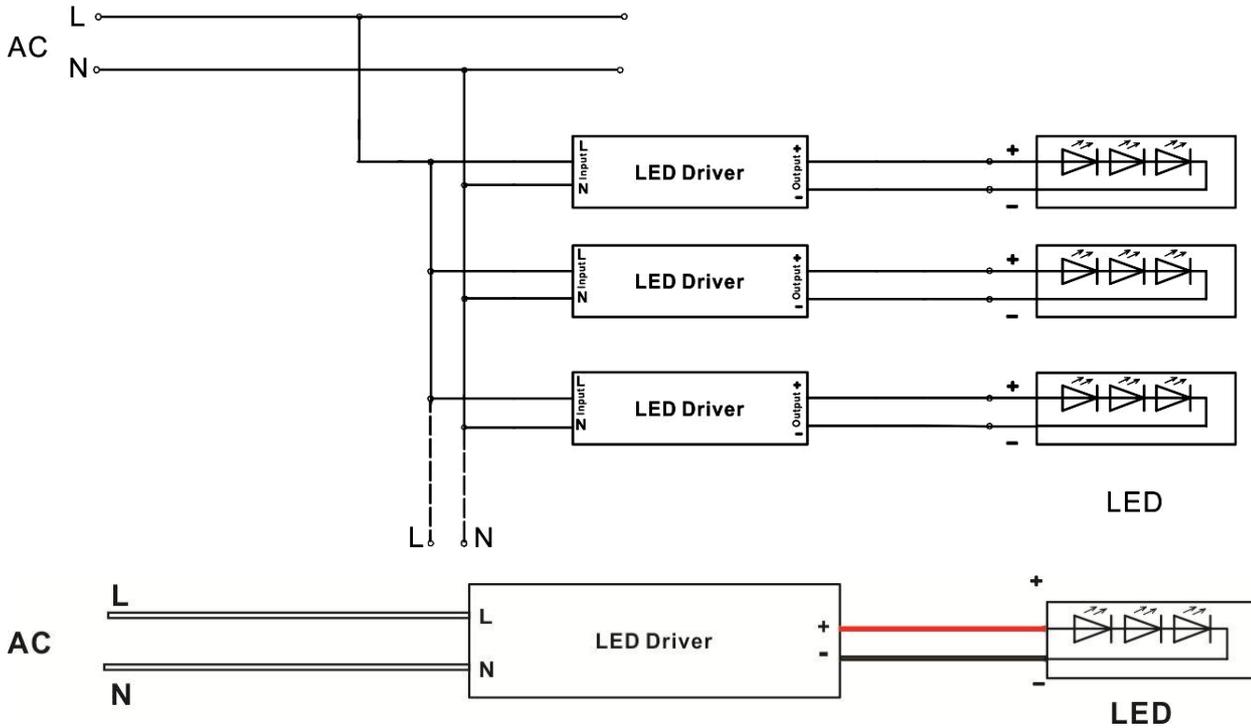

■ Instruction:

- ※ This driver should be installed by qualified and professional person;
- ※ Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- ※ Ensure that wiring is correct before test in order to avoid light and power supply damage;
- ※ If the LED drivers do not work normally, pl. don't maintain privately, but contact us:
sales1@smartselectronics.com Or take a phonecall: 0086-595-22863721 ext.808

For more information, pl. Login Official website: www.smarts-electronics.com