

90W Waterproof LED Power Supply



Features:

- IP67 design for indoor or outdoor installations
- Protections: Short circuit/Overload/Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting
- Products through UL, CE, RoHS Certification
- 2 years warranty


IP67 SELV UL CE RoHS

SPECIFICATION

| MODEL | SMT-012-090VW | SMT-024-090VW | | |
|-------------|--|--|---------|--|
| OUTPUT | DC VOLTAGE | 12V | 24V | |
| | RATED CURRENT | 7.5A | 3.75A | |
| | CURRENT RANGE | 0~7.5A | 0~3.75A | |
| | RATED POWER | 90W | 90W | |
| | RIPPLE&NOISE(max) | 150mV | 140mV | |
| | VOLTAGE TOLERANCE | ±0.5V | ±0.5V | |
| | SETUP RISE TIME | 80ms/110VAC | | |
| | HOLD UP TIME(Typ.) | 60ms/110VAC | | |
| INPUT | VOLTAGE RANGE | 100~265VAC | | |
| | FREQUENCY RANGE | 50~60Hz | | |
| | POWER FACTOR(Typ.) | | | |
| | EFFICIENCY(Typ.) | > 83% | | |
| | AC CURRENT(Typ.) | 0.92A/110VAC, 0.86A/220VAC | | |
| | INRUSH CURRENT (Typ.) | COLD START 50A/110VAC, 220VAC | | |
| PROTECTION | Short circuit | Protection type:recovers automatically after condition is removed | | |
| | Overload | overload protected@145-160% above peak rating | | |
| | Over temperature | Protection type:Shut down o/p voltage,re-power on to removed | | |
| ENVIRONMENT | WORKING TEMP. | -30~+50°C (Refer to output load derating curve) | | |
| | WORKING HUMIDITY | 20~99% RH non-condensing(Waterproof IP67) | | |
| | STORAGE TEMP.,HUMIDITY | -40~+80°C,10~99%RH | | |
| SAFETY&EMC | SAFETY STANDARDS | CE UL Mark(LVD) | | |
| | WITHSTAND VOLTAGE | I/P-O/P:1.5KVAC IP-GND:1.5KVAC | | |
| | EMC Test Standards | EN55015:2006;EN61547:1995+2000;EN61000-3-2:2006 EN61000-3-3:1995+A2:2005;EN61346-1:2001;EN61347-2-13:2006 | | |
| NOTE | 1.All parameters NOT specially mentoned are measured at 110VAC,220VAC input,rated load and 25°C of ambient temperature. 2.Ripple&noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf&10uf parallel capacitor. 3.Tolerance:includes set up tolerance,line regulation and load regulation. | | | |

90W Waterproof LED Power Supply


Mechanical Specification

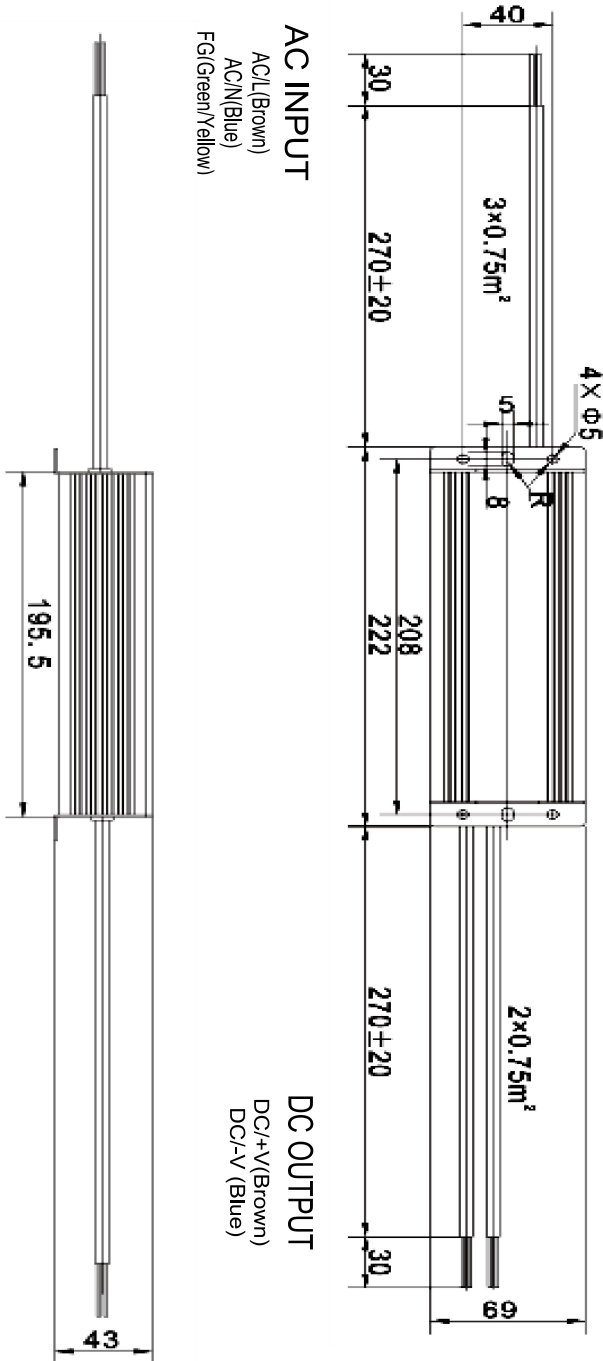

Others

| | |
|-----------------|--------------------|
| DIMENSION | 222×69 43mm(L×W×H) |
| CARTON QUANTITY | 20pcs/carton |
| CARTON SIZE | 309×279×176mm |
| WEIGHT | 1.1Kg/pcs |

Derating Curve

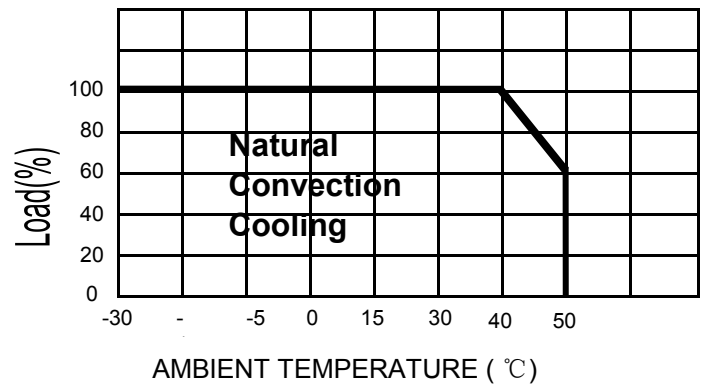

Cable Model of input : VDE H03VV-F 3G0.75mm²

Cable Model of output: VDE H03VV-F 2*0.75mm²